CRYOCOMP

Cryogenic Valves

Cryocomp valves are available in 1/4" tube through 2" pipe size weld ends, manual or actuated function. Our valves are also available in 3 different body configurations, globe, right angle or y-pattern. Accessories and options increase the capabilities and performance of our high quality valves.



C2000 Valve Series Pipe Size Manual and Actuated







C2000 Series Manual YPattern Valve

C2000 Series Manual Globe Valve

C2000 Series Actuated Globe Valve C2000 valves range from 1/2" tube (with optional adapter) to 2" pipe size weld ends. Applications for the C2000 Series include vacuum-jacketed piping, cold boxes, manifolds and tank systems. These vacuum-jacketed valves can be used with liquid nitrogen, helium, argon, oxygen service (with proper cleaning) and other cryogenic liquids. Precision trim options available, please see back page.

C5000 Valve Series Tube Size Manual and Actuated



C5000 Series

Manual Globe Valve


C5000 Series Actuated Globe Valve




C5000 Series Right Angle Valve

Cryocomp C5000 vacuum-jacketed valves are available in 1/4" to 1/2" tube size weld ends in globe or right angle body configuration. Applications for the C5000 Series include vacuum-jacketed piping, cold boxes, helium transfer lines and cryogenic piping systems.


天津多为莱博科技有限公司网址: www.dowelllab.com联系电话:022-26802283邮箱:sales@dowelllab.com



Design The Perfect Valve










Globe


Right Angle

Y-Pattern*

Cold Box Jacket




Actuator with Positioner I-P and P-P



Characterized Flow Plugs Equal Percent & Linear Available

Characterized Flow Plugs


Cryogenic Valve Part Numbering System

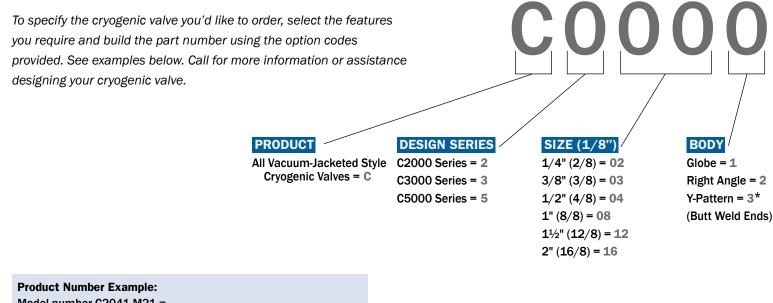


Model number C2041-M21 = Series 2000, 1/2", globe, manual, port with pipe plug, full jacket

* For C3000 or C5000 Y-pattern Valves, consult factory.








Filter Regulator Solenoid Valve

Typical Lift Flow Curves

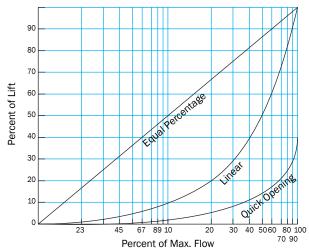

SPECIAL CONNECTIONS

MPT = PFPT = F Tube = T AN Male = A Butt Weld Tube = M Socket Weld Pipe = S Soc Weld Tube = B Soc Solder Copper = C Flare Tube and Nut = N

OPERATION

Manual = M Actuated/Pneumo/NC = A Port with Pipe Plug = 2 Actuated/Pneumo/ NO = B Actuated/Pneumo/ Special = C Actuated Valve Assembly without Actuator = D Actuator with Solenoid = E

Actuator with Solenoid and Filter/Regulator = F

sales@dowelllab.com ▼ 022 - 2 6 8 0 2 2 8 3 ▼ www.dowelllab.com

Check Valve = K

PURGE PORT

No Port = 1Port with Relief Valve (150 Cold Box Jacket = 3 PSIG) = 3Port with Relief Valve

(XXX PSIG) (specify with order) = 4

VACUUM JACKET

Full Jacket = 1 No Jacket = 2 Special = 4

OTHER FEATURES


Flow Plug (EQ%) = A Flow Plug (Linear) = B Specify with Order = X Gas Trap = T

We Make **Custom Valves**



Valve Sizing: Flow Calculations

Basic Liquid Flow Formula



 $C_V =$ Flow Coefficient $Q_L = Flow (GPM)$ SG = Specific Gravity ΔP = Pressure Drop (PSIA)

Table of Flow Coefficients

Cryofab Valve Size	C _V by Body Style		
C2000 & C3000	Globe	Angle	Y-Pattern*
1⁄2"	2.6	5.7	5.6
1"	16.3	28.6	25
1½"	31	37	42
2"	42.3	54	59.4
C5000	Globe	Angle	
1⁄2"	1.1	2.3	

Specific Gravity Table for Common Fluids (SG)

Water	1.000
LN ₂	0.808
LH ₂	0.071
LHe	0.125
LAr	0.400
L0 ₂	1.140

Liquid Helium Valves & Manifolds

C3000 Liquid Helium Valve Series Manual and Actuated





C3000 Series Manual Globe Valve

C3000 Series Actuated Right Angle Valve Cold Box Jacket (Cuff)

Cryocomp Liquid Helium valves are available in 1/2" and 1" pipe size weld ends. There are two body styles: globe and angle, as well as manual and actuated designs. Options include flow plugs, solenoid valves, regulators/filters, switches and positioners to increase capabilities and performance. C3000 valves are ideal for vacuum-jacketed piping, cold boxes, helium transfer lines and helium liquefiers.

Cryocomp Custom Manifolds



Vacuum-Insulated Custom Manifolds



LN₂ Cold Box Switcher

Custom manifolds are fabricated to customer requirements for cryogenic liquids including nitrogen, argon, oxygen, hydrogen and helium service. Any number of manual or actuated valves may be incorporated into the design. Inner line sizes range from 1/4" o.d. tube to 2" pipe. Manifolds & assemblies can include tees, elbows, bayonets, flexible hose sections, internal expansion joints, instrumentation and customer specified components.

Precision Flow with "Needle and Seat Trim"

Cryocomp offers an option for our 1/2" C2000 valves which greatly enhances the performance to specific Cv values. A control range of Cv=0.500 down to 0.0003 is accomplished through the use of several "needle and seat" combinations that are machined and installed into the valve bodies. These precision Cv trim values are typically available for the globe and right angle configuration valves with a pneumatic actuator and precision positioner. The ability to select appropriate flow characteristics through the selection of unique "trim" sizes enables a system to function and many times exceed the client's design specifications. Please consult the factory for additional information on this option.

Contact us today for a quote

sales@dowelllab. com phone: 022-26802283 www.dowelllab.com

(I)

天津多为莱博科技有限公司 网址:www.dowelllab.com 联系电话:022-26802283 邮箱:sales@dowelllab.com

